


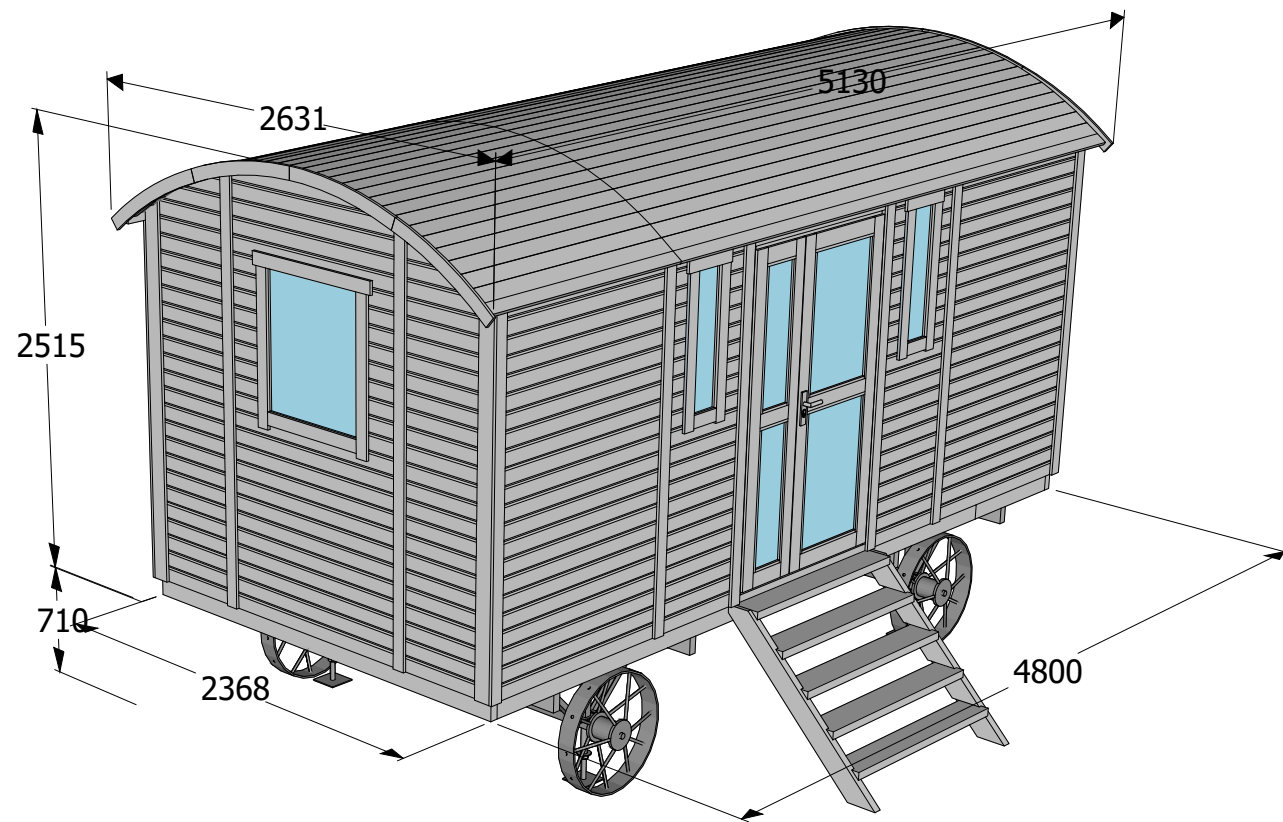


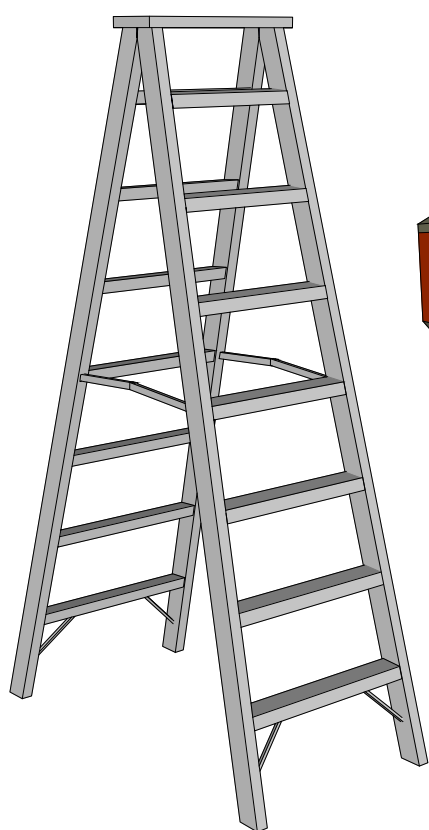
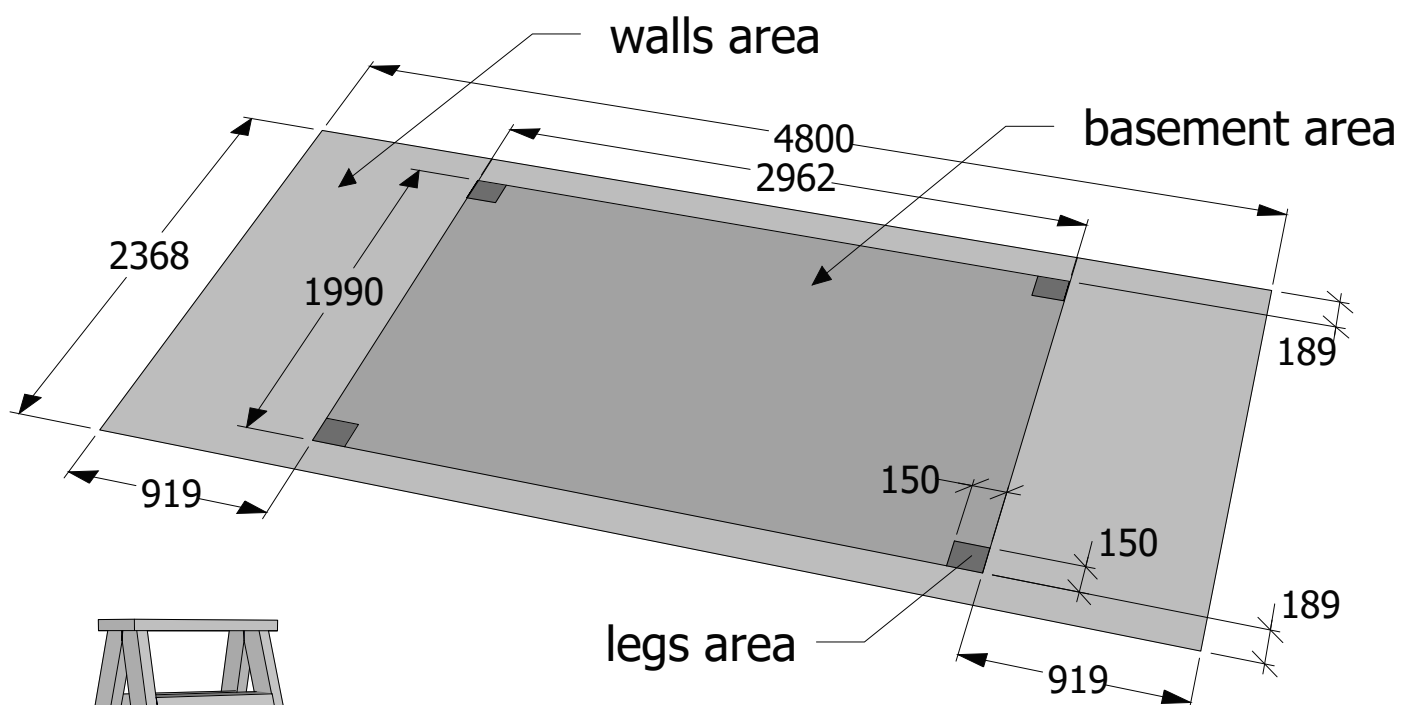
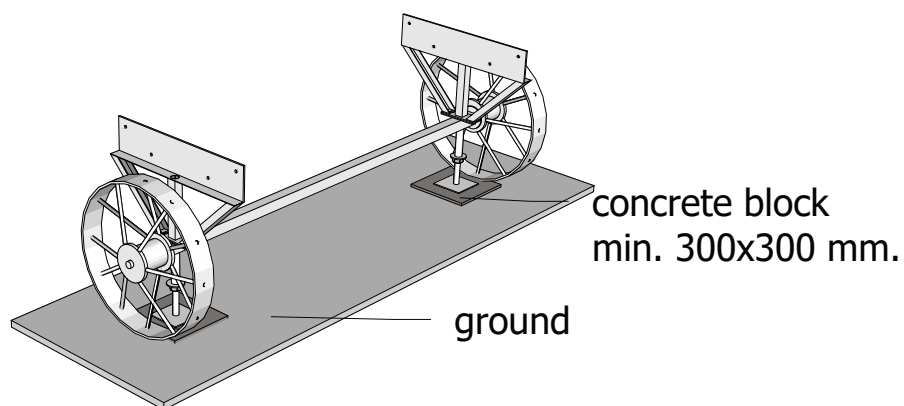





**This wagon must be based on
adjustable legs and is not movable.**




D 10 mm.



Possible walls compilation options

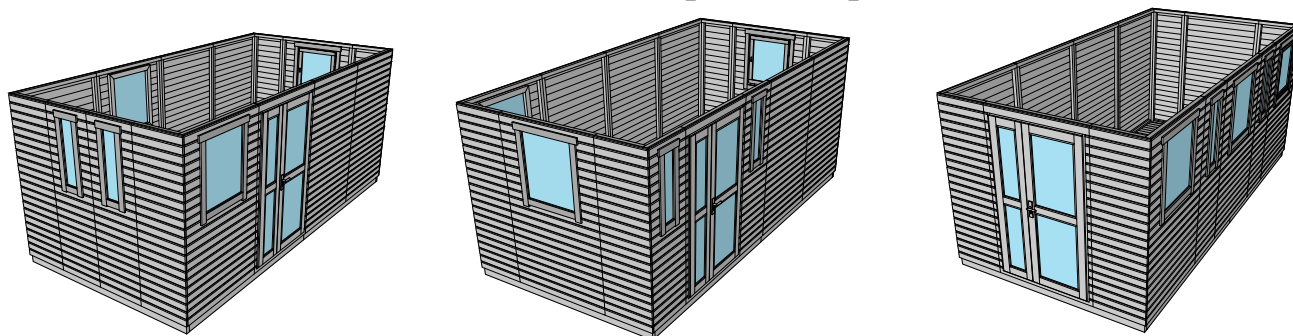



Metallic wheels assembly

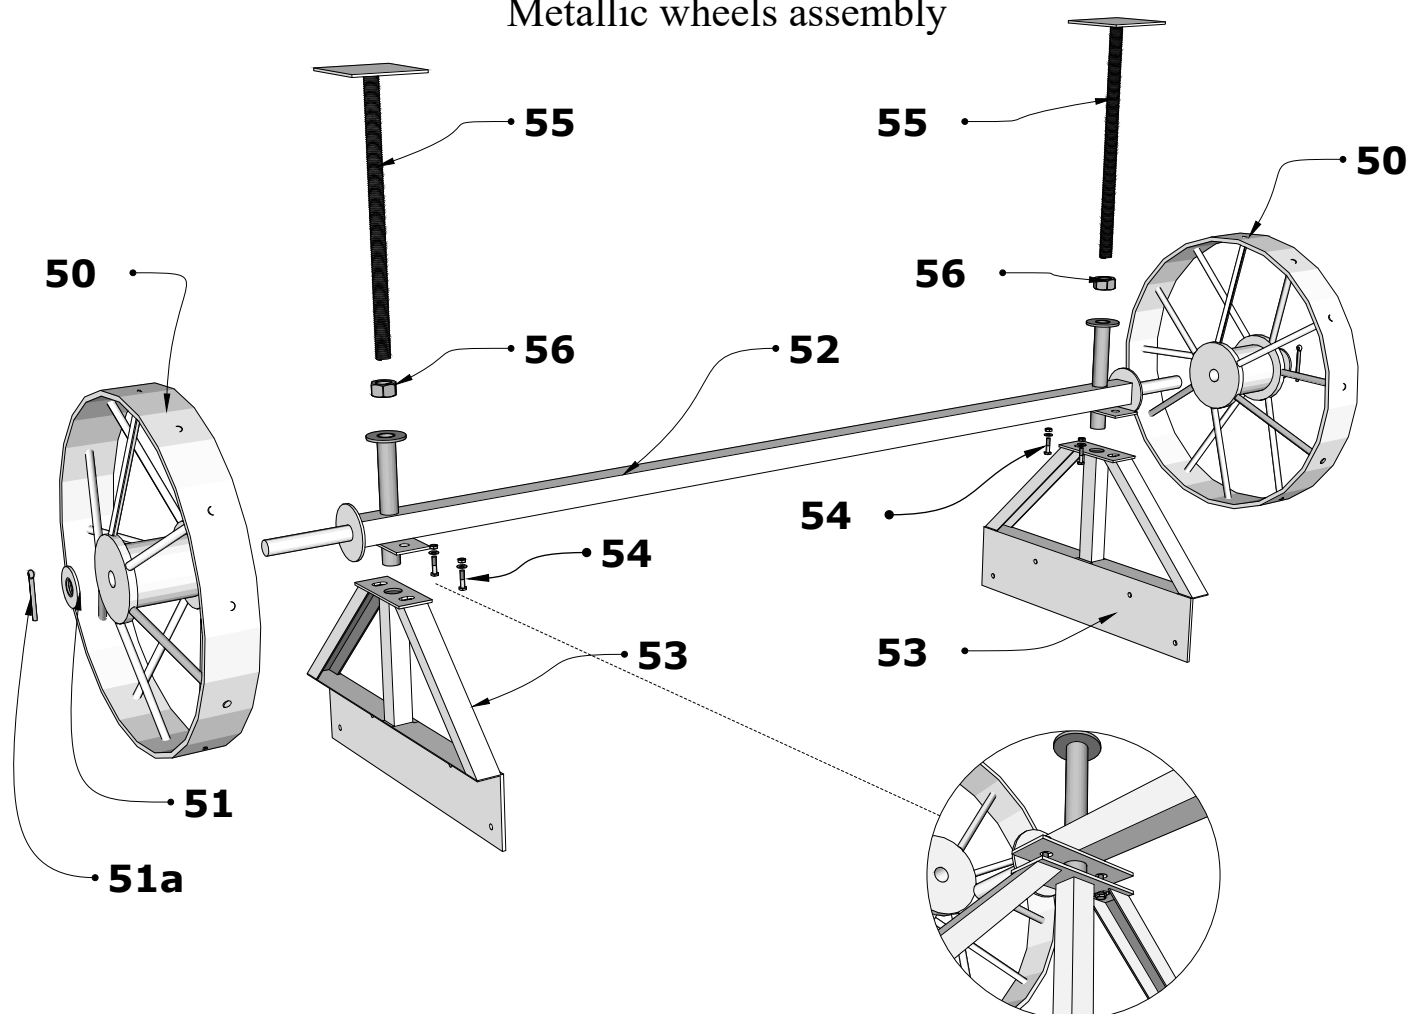

Assembly instruction Gypsywagon side door


page 3/12

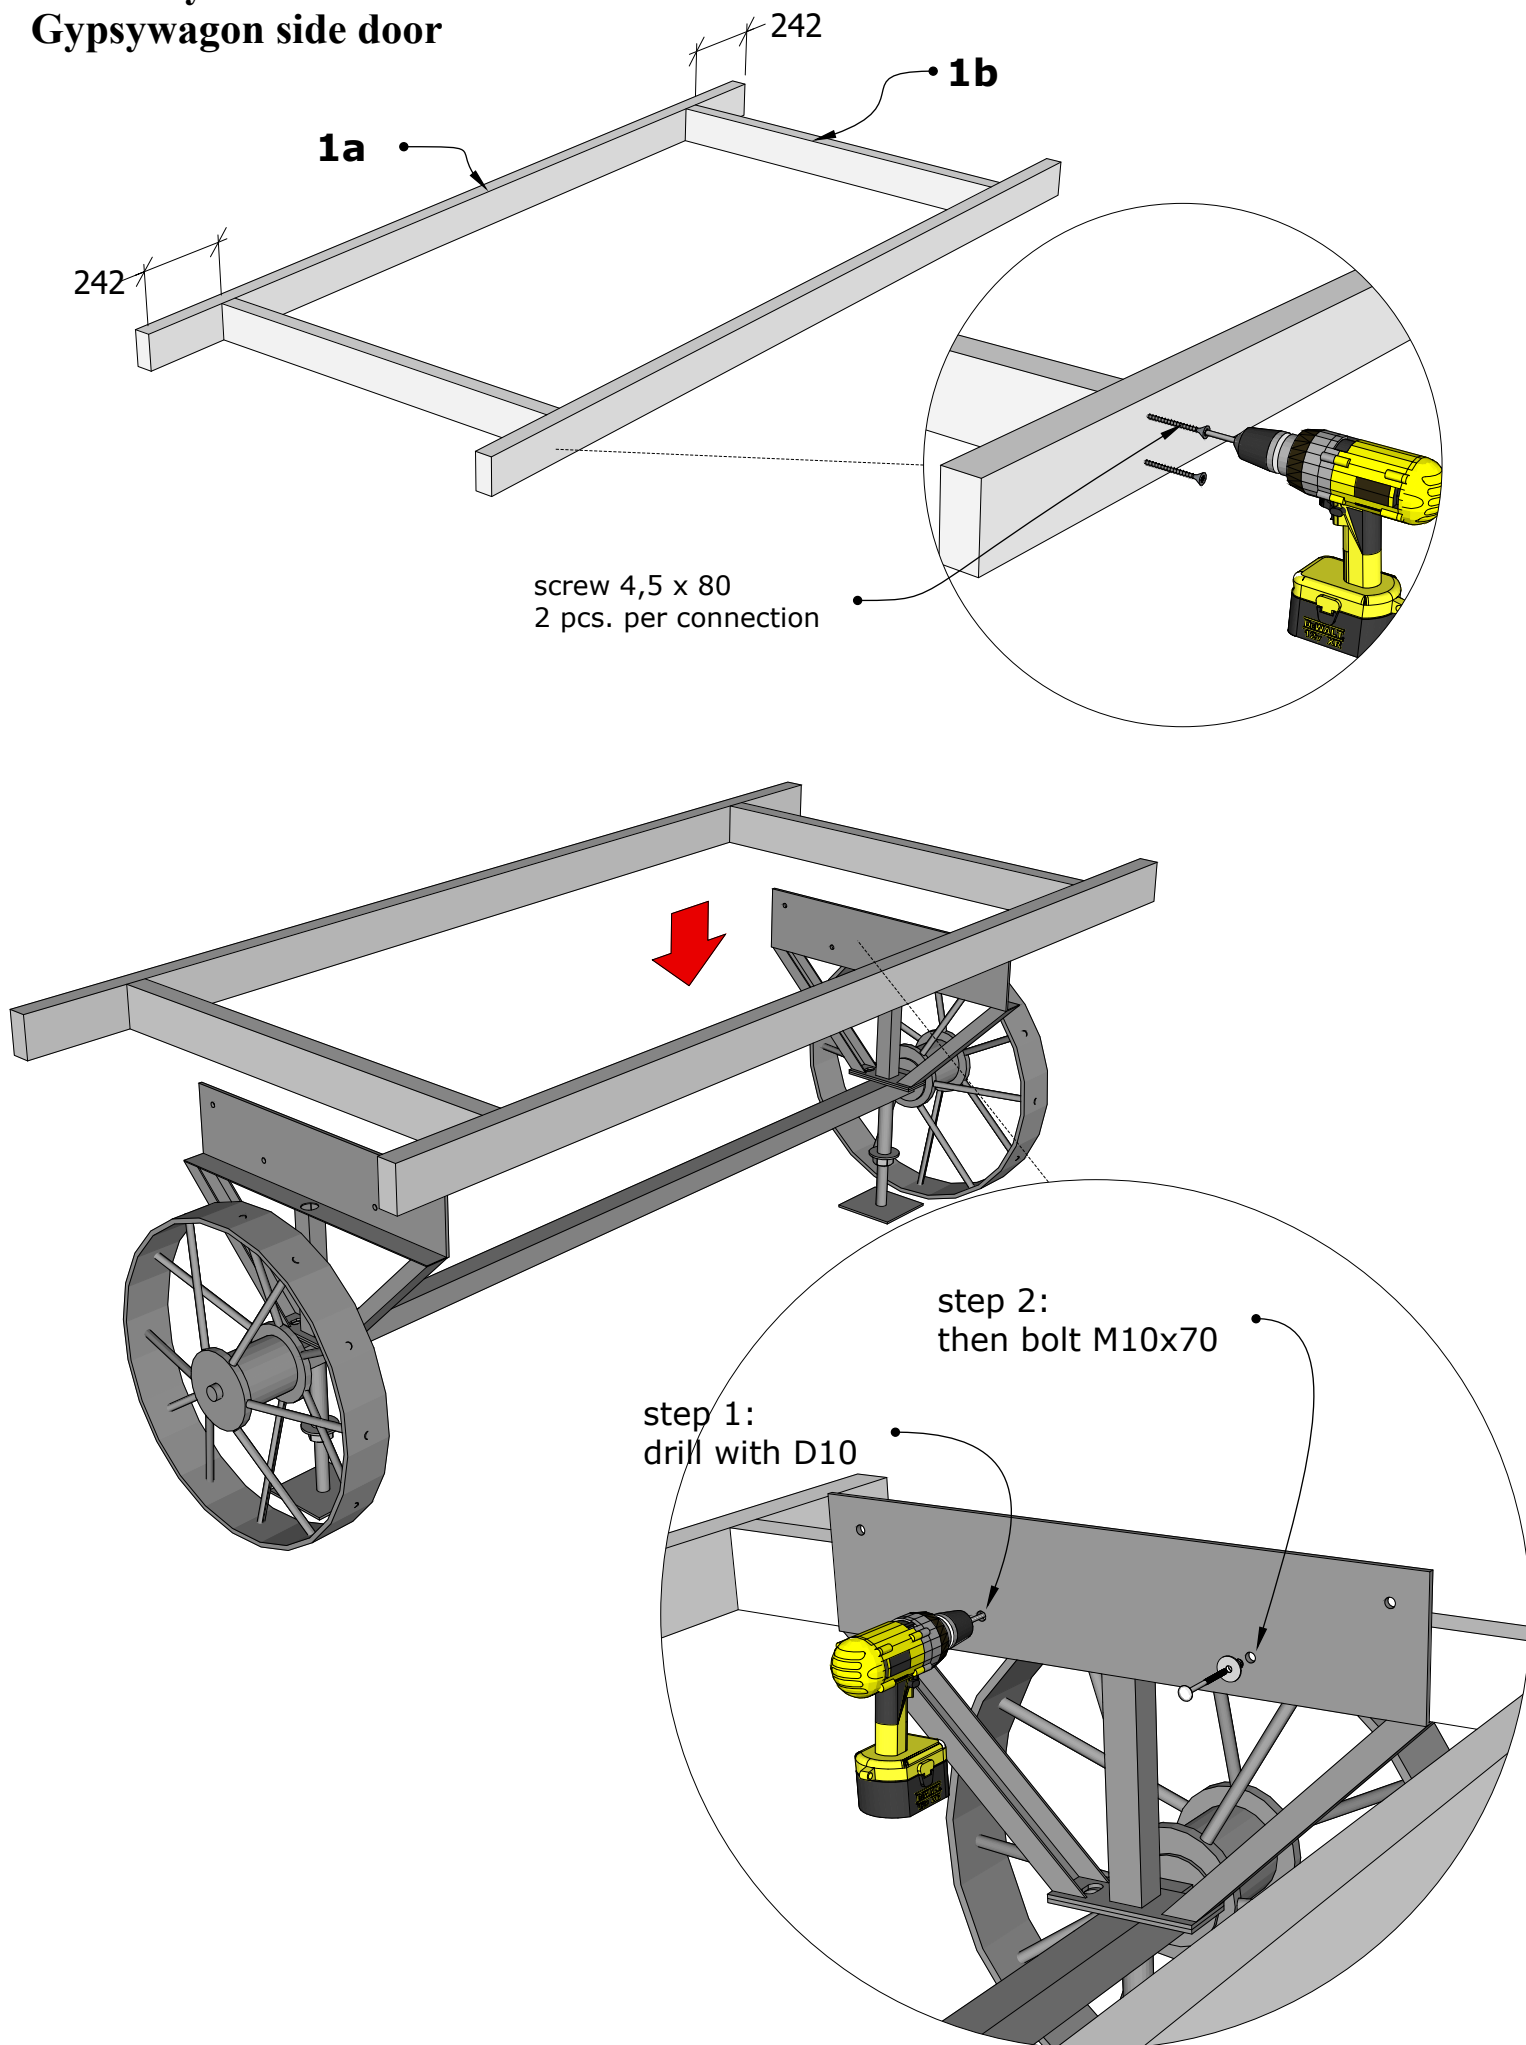

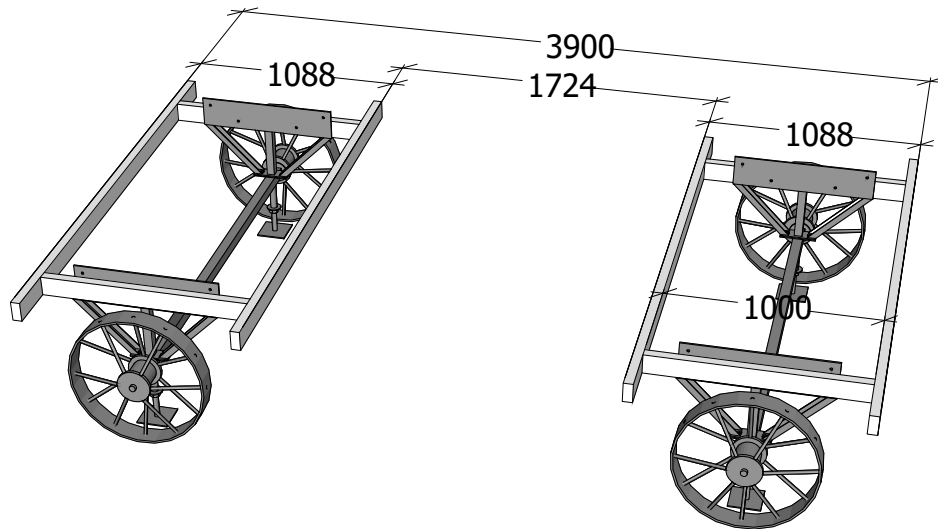

2a


2b





2c

do it 7x


12 screws 4,5x80
per connection

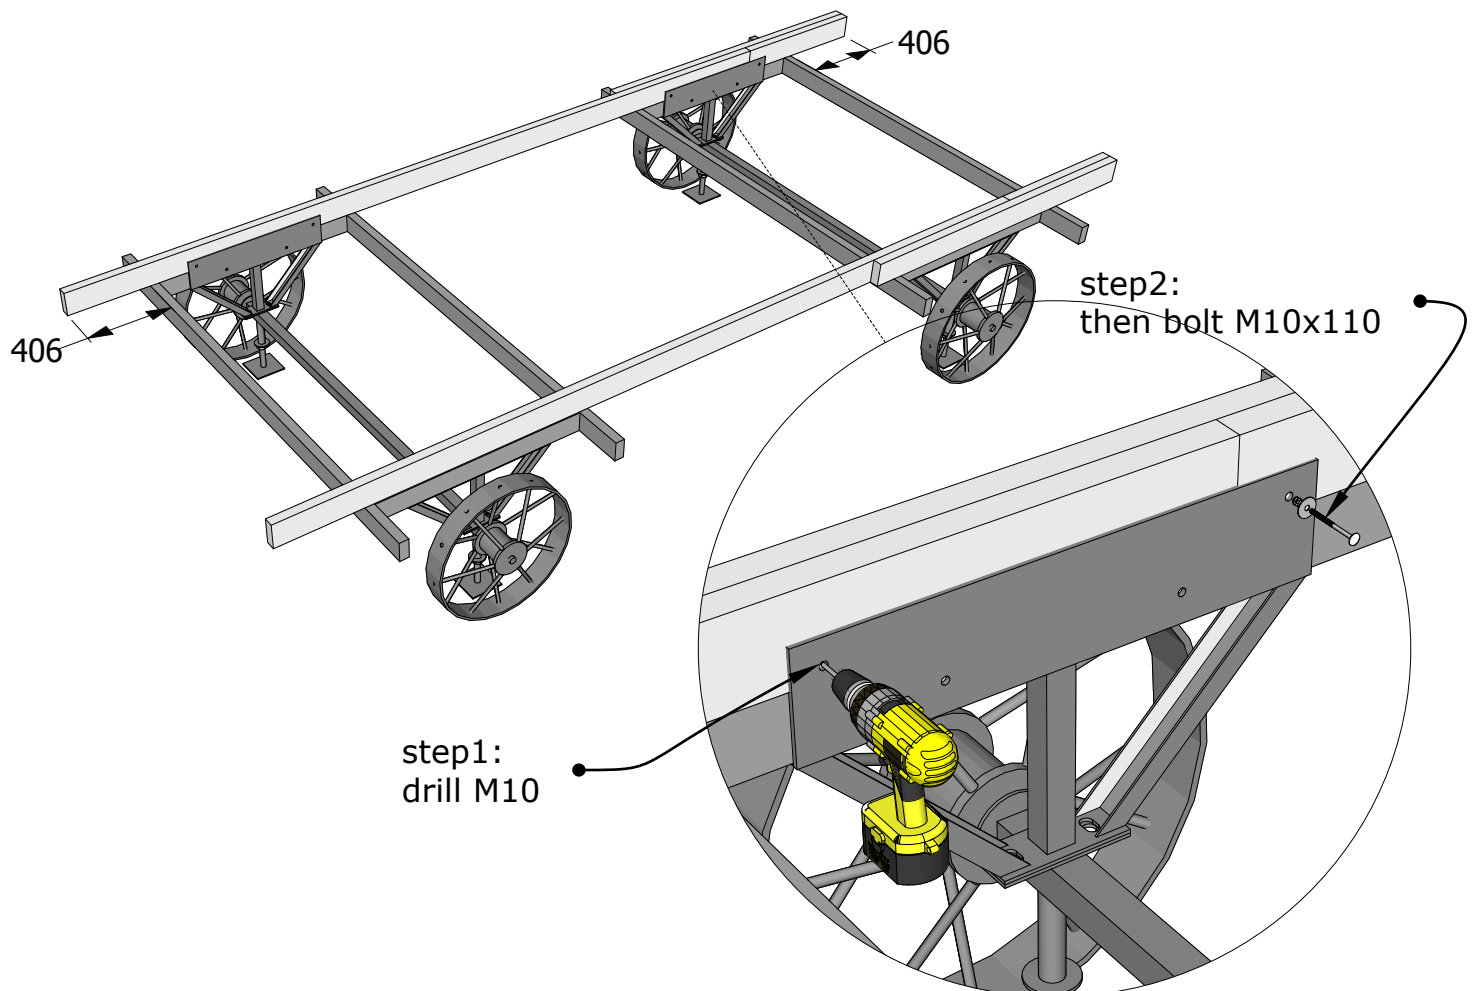

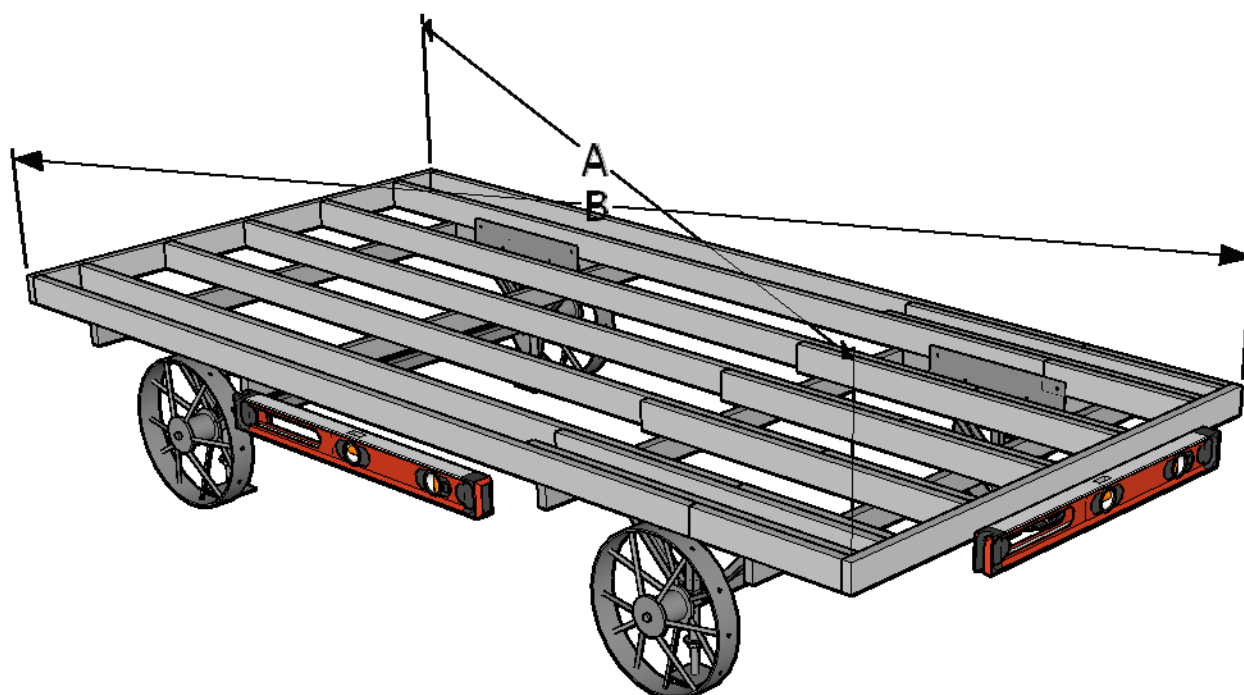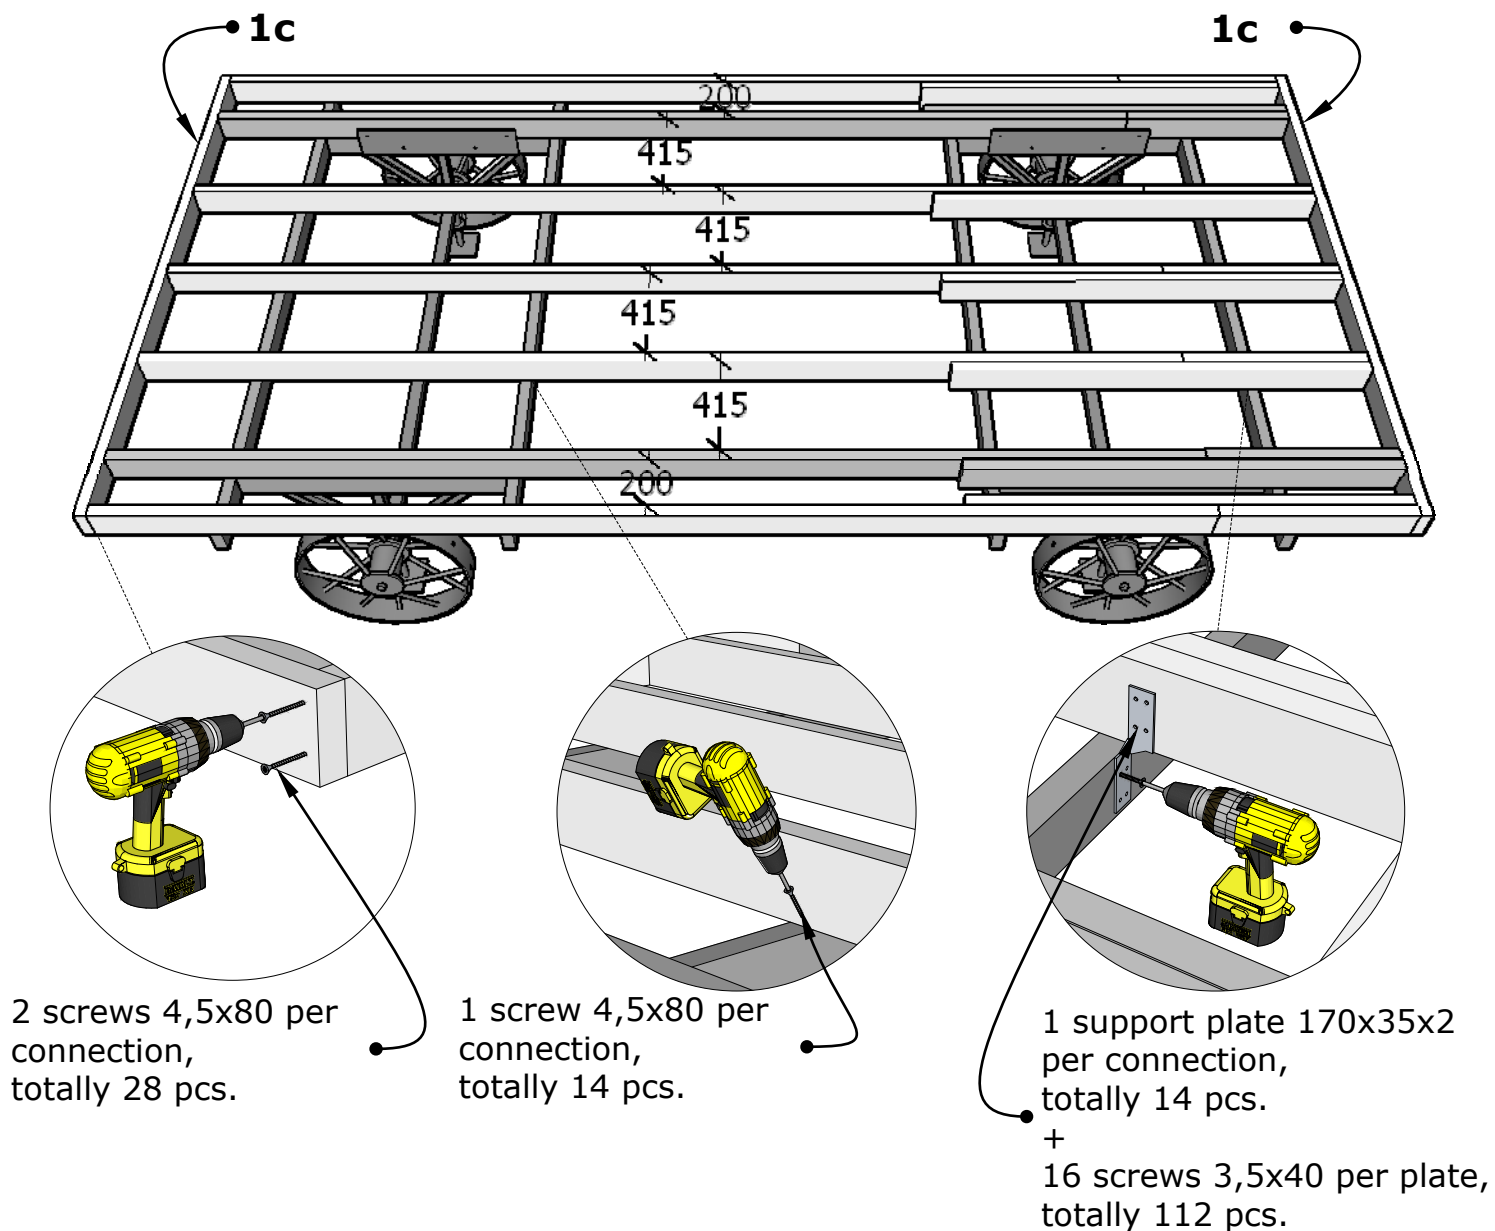


Assembly instruction Gypsywagon side door


page 6/12

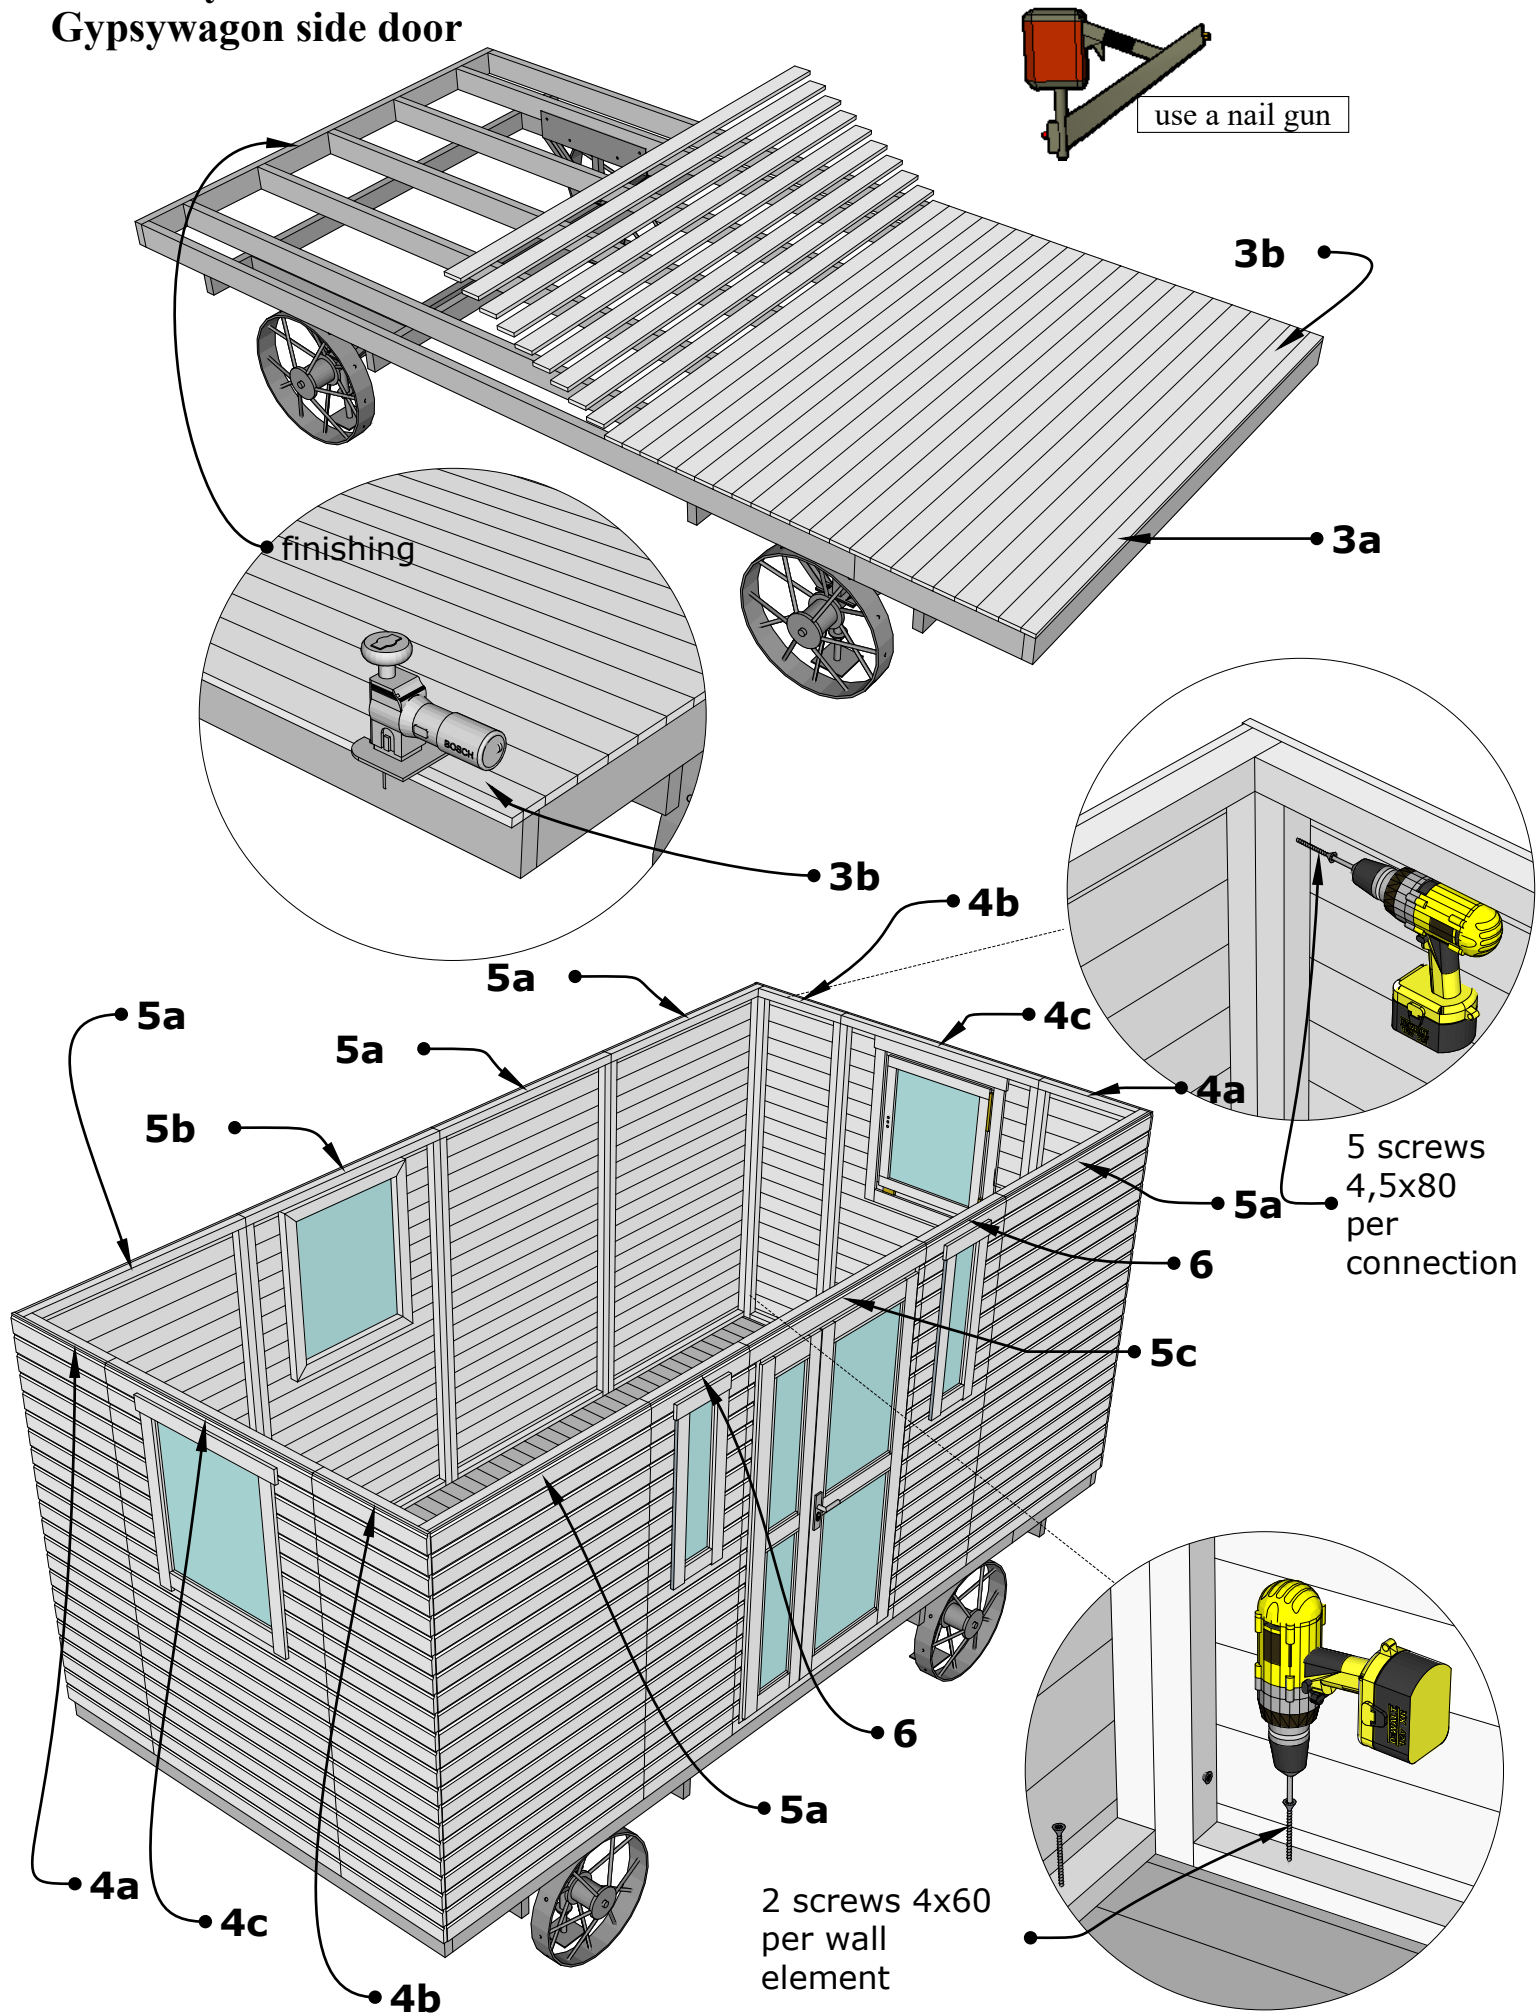

Assembly instruction Gypsywagon side door


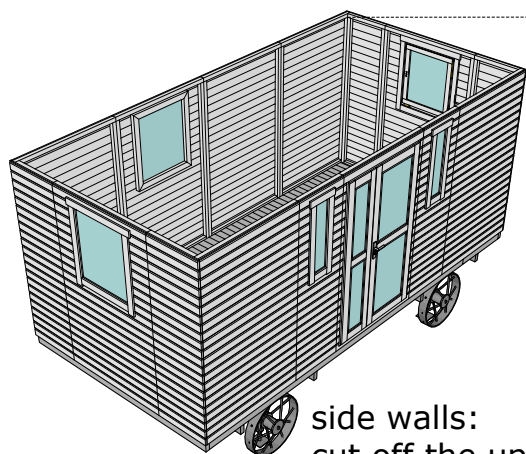


side walls:
cut off the upper bung

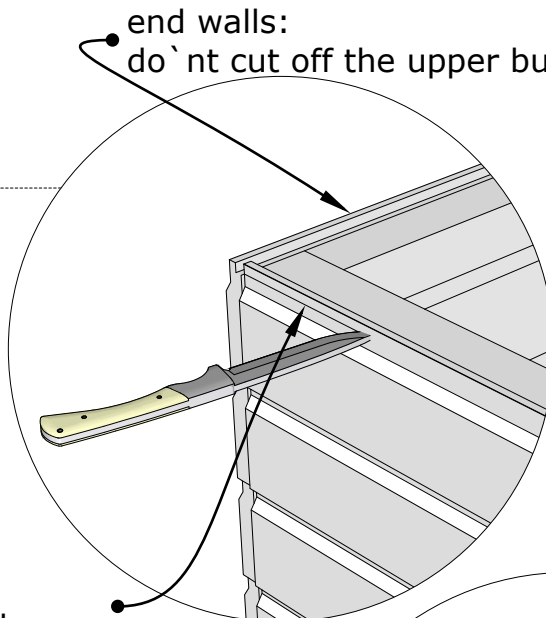


end walls:
do`nt cut off the upper bung


8 screws 4,5x80
per arched element

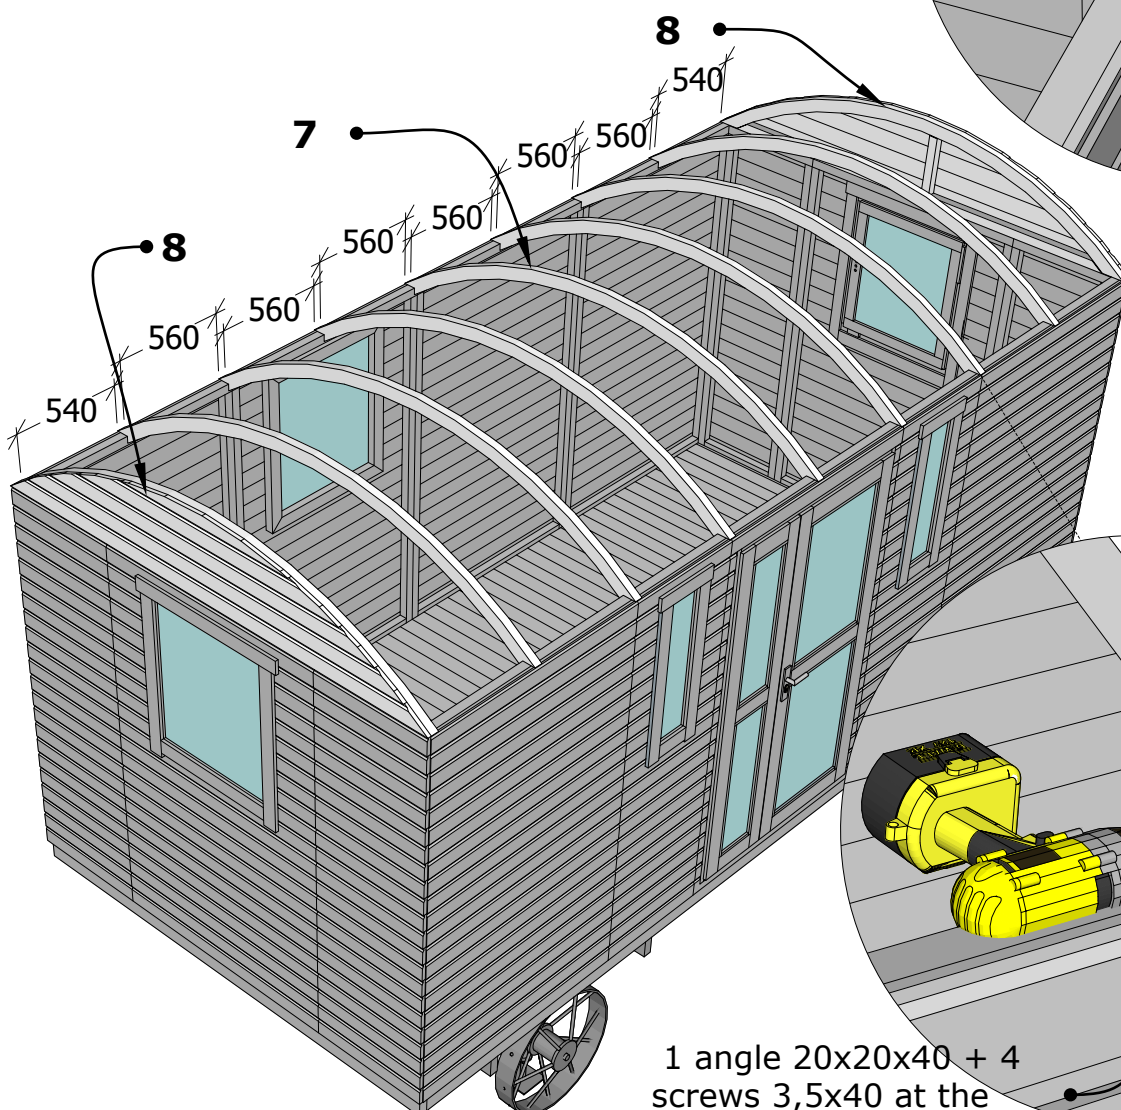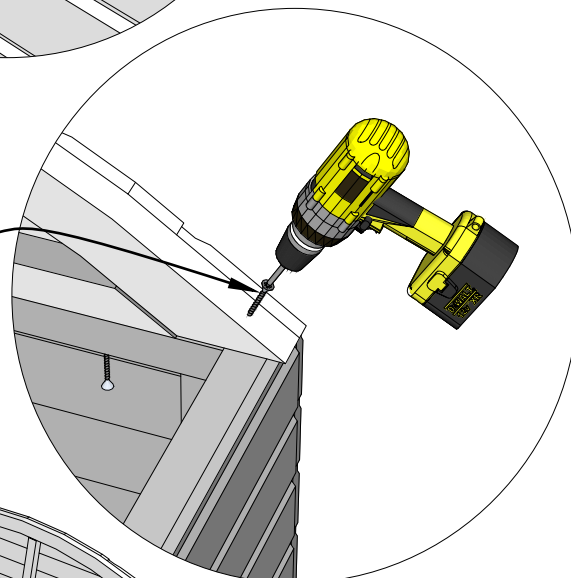

1 screw 4x60
at the end of
each arc


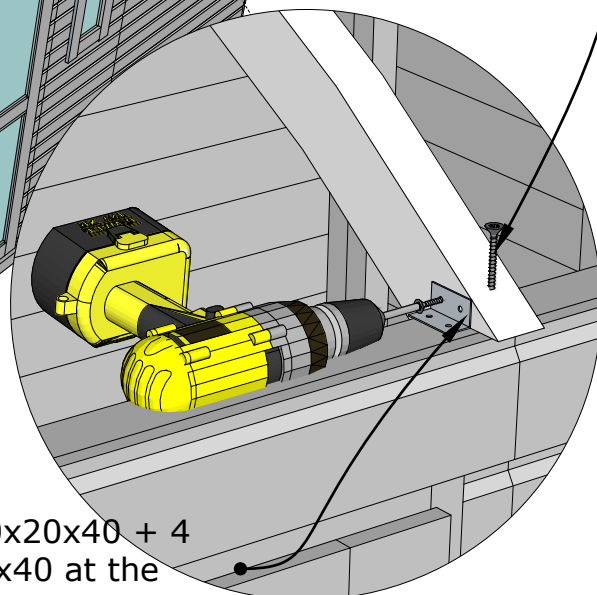



1 angle 20x20x40 + 4
screws 3,5x40 at the
end of each arc

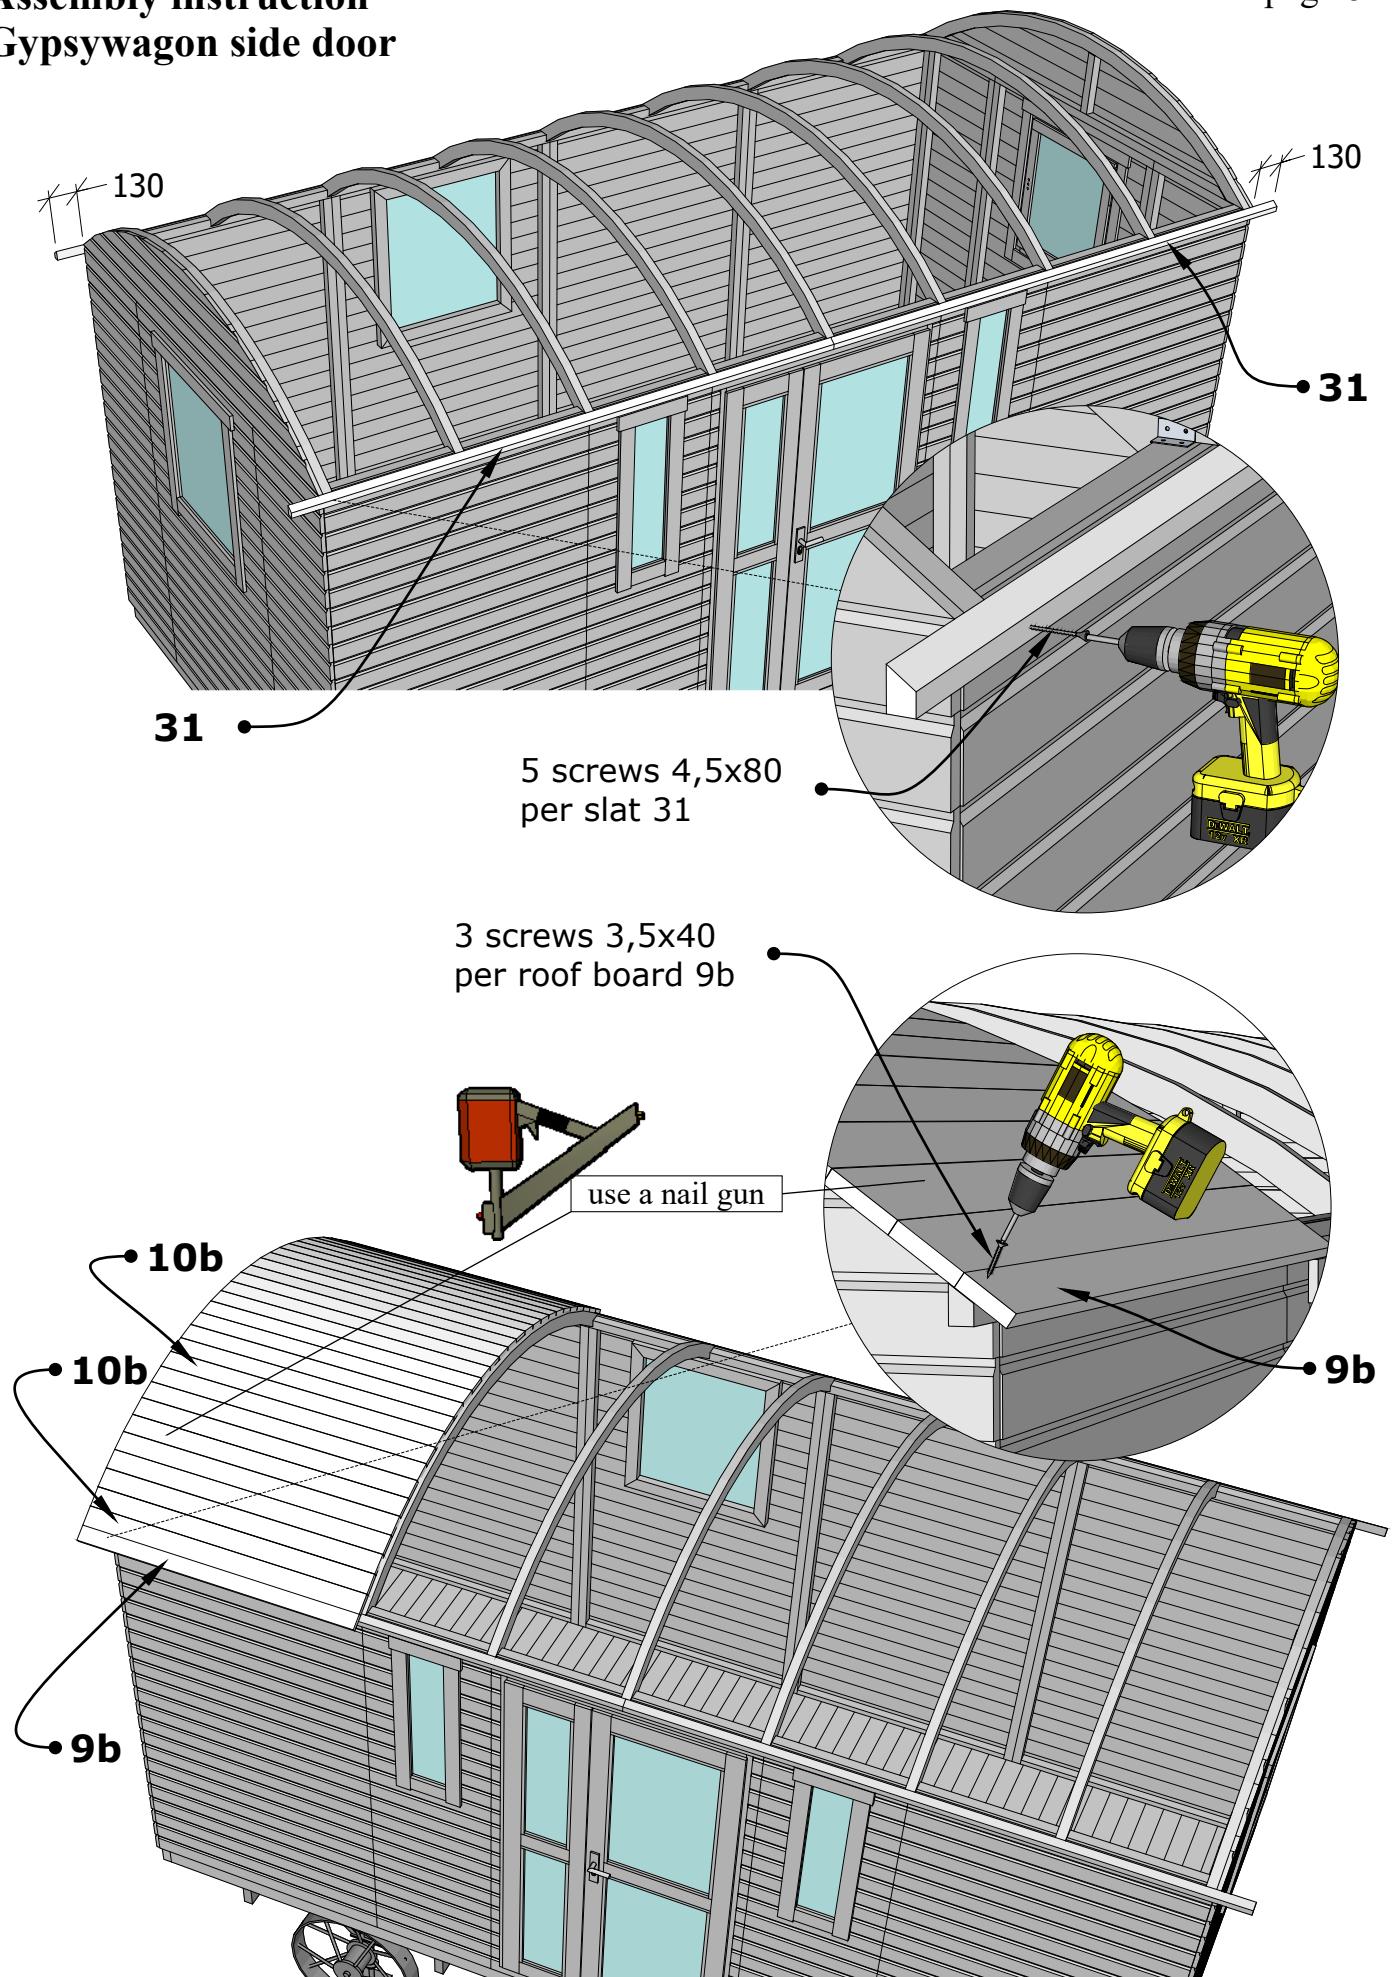

Assembly instruction Gypsywagon side door




page 9/12

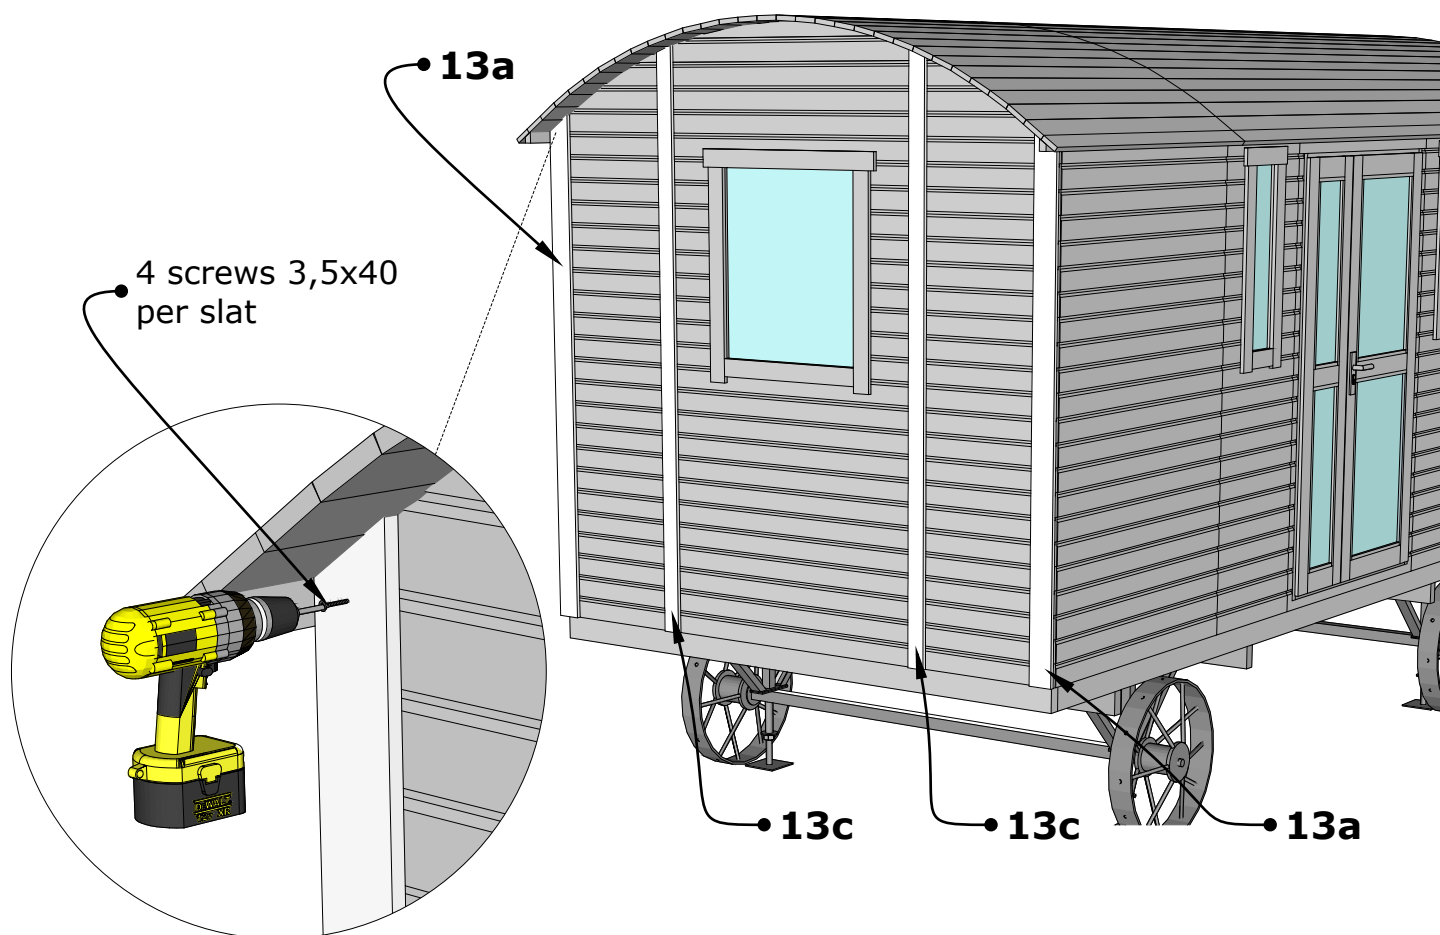
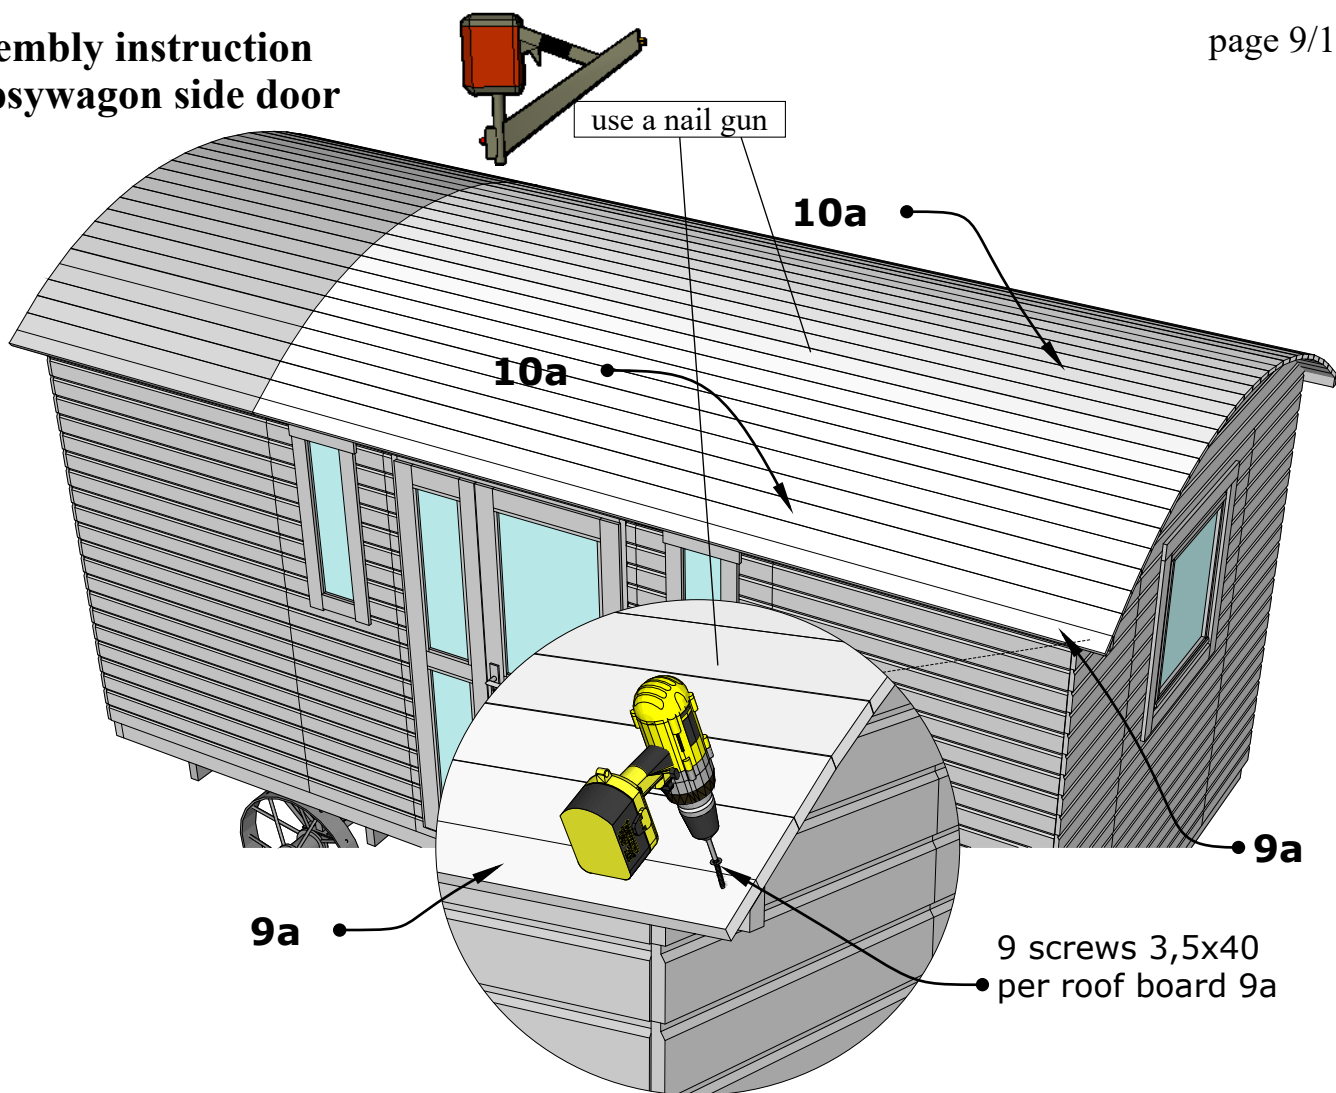


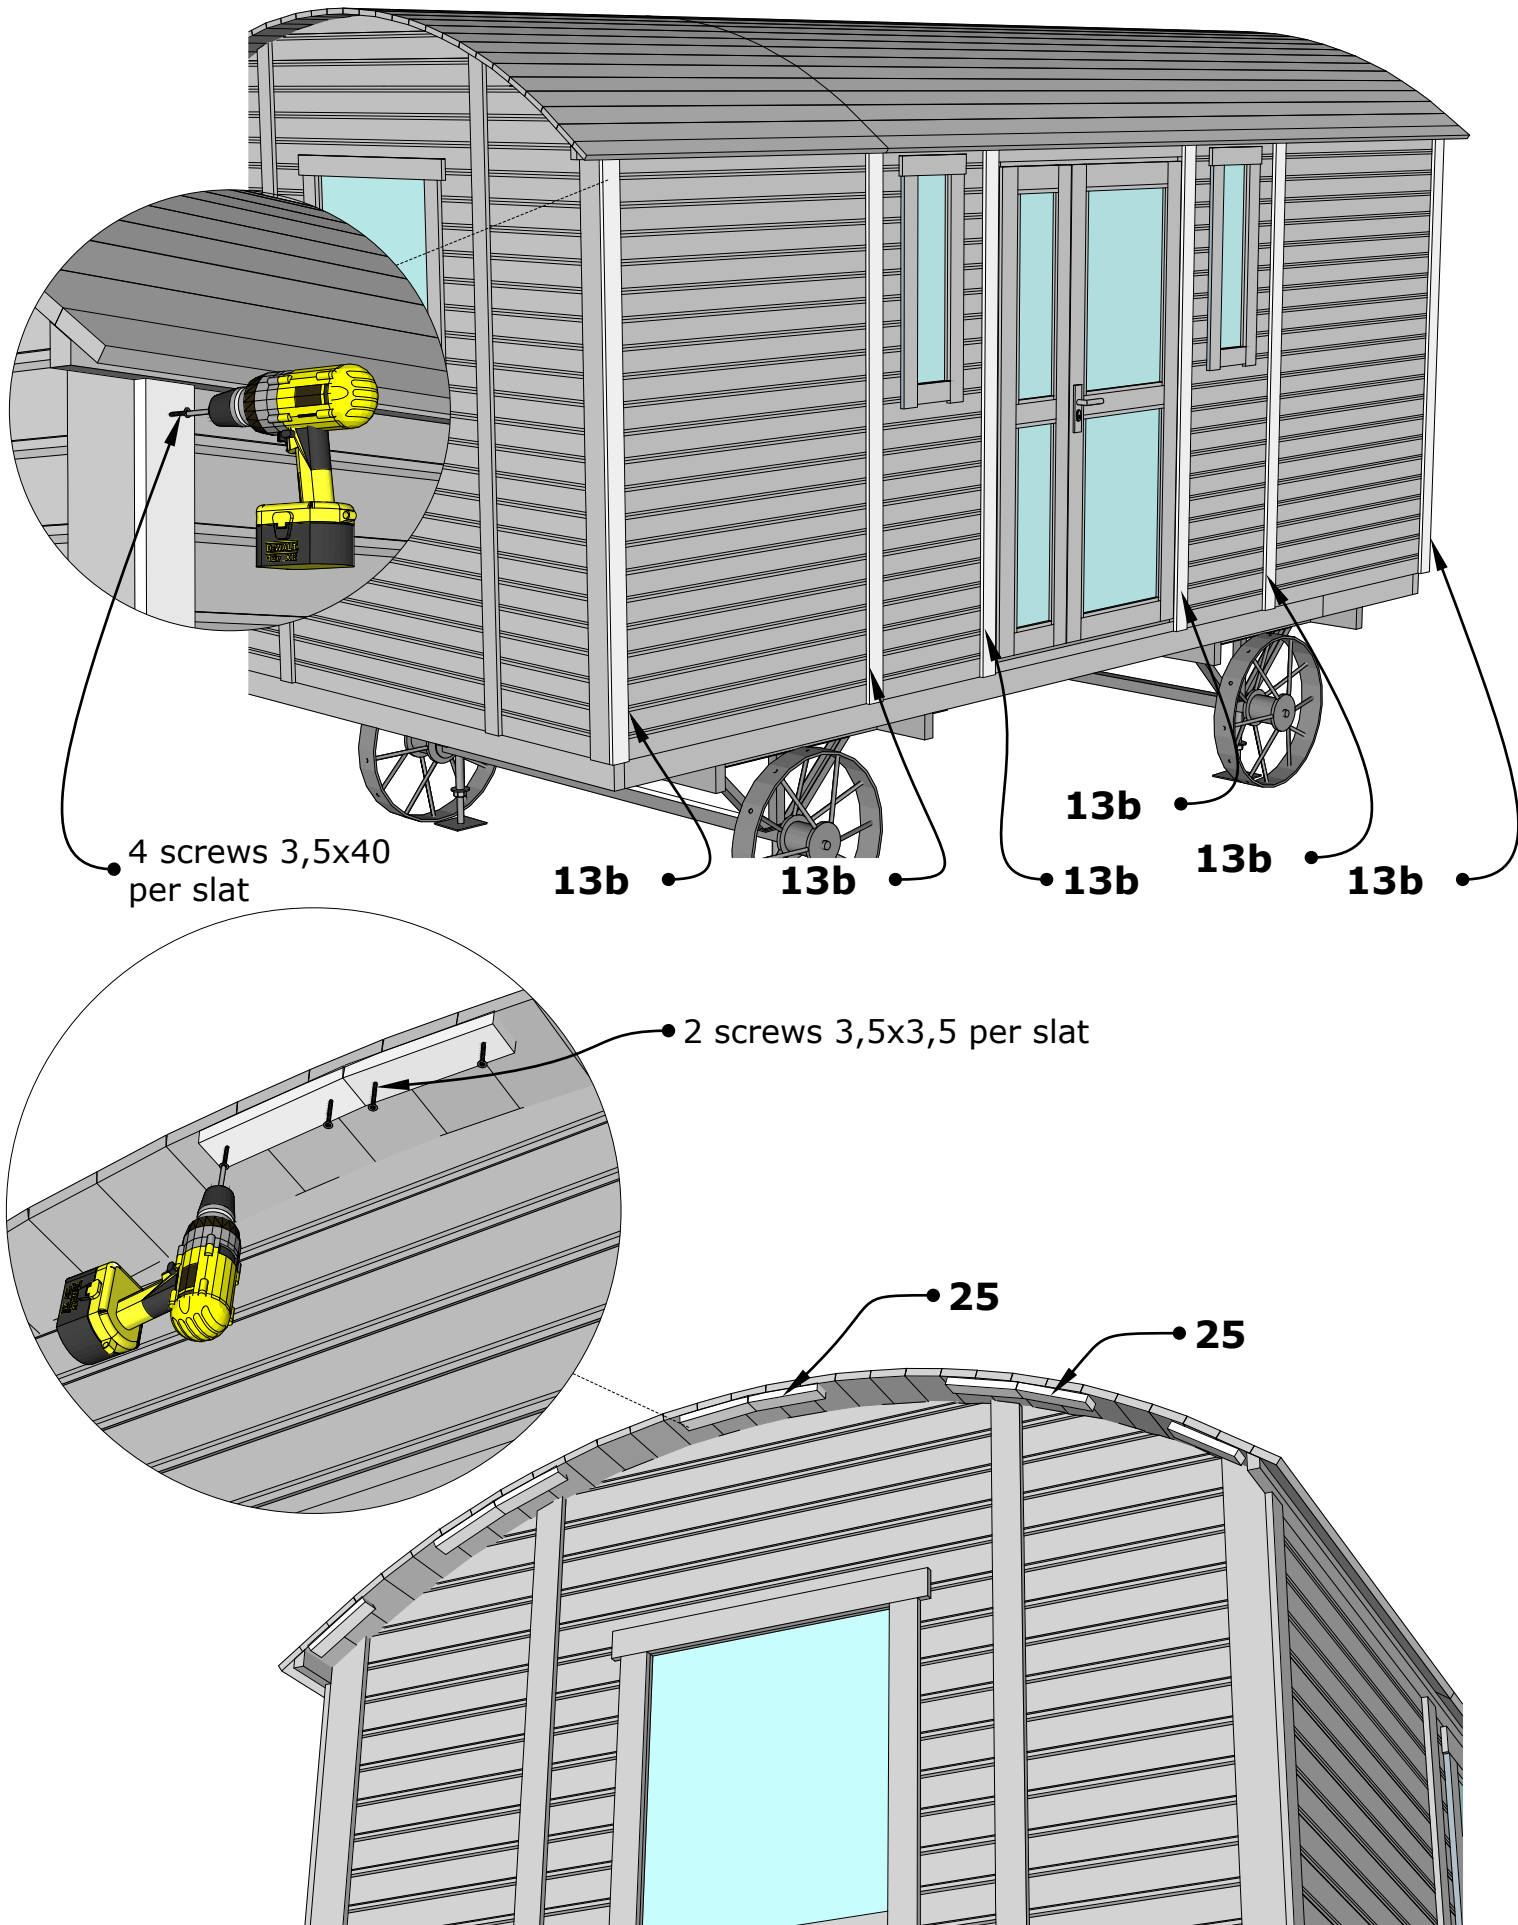


Assembly instruction Gypsywagon side door

page 11/12

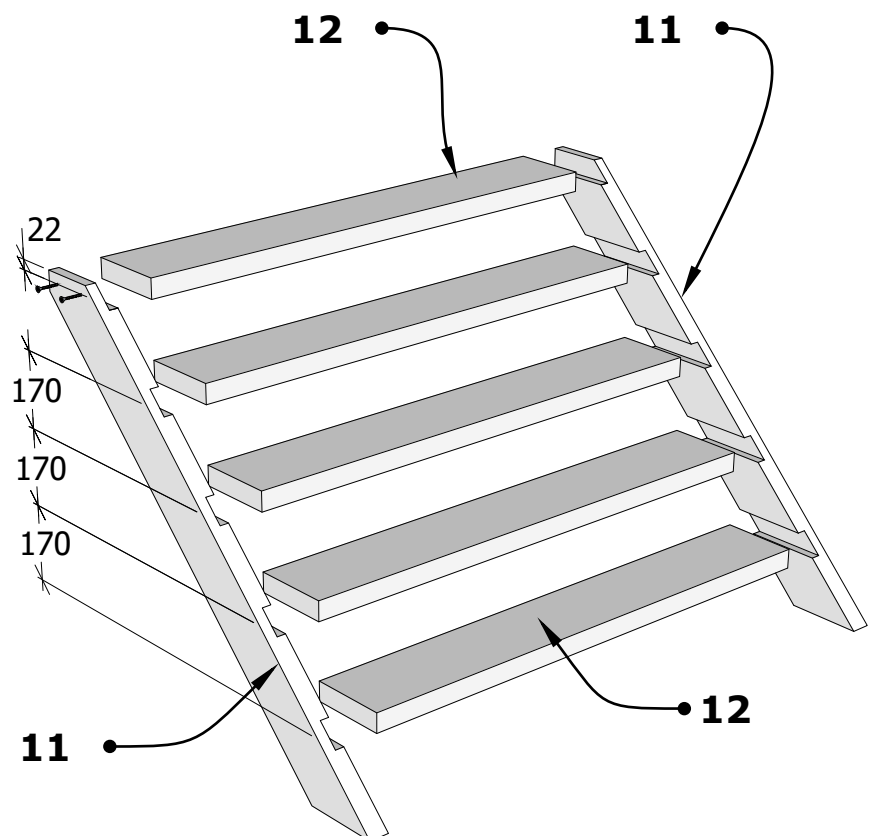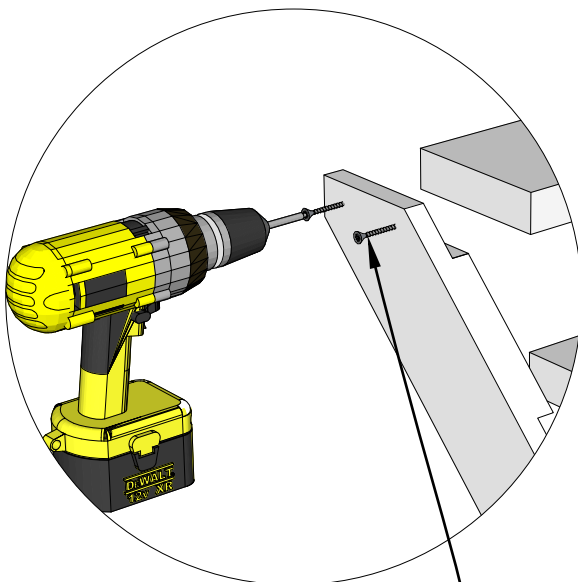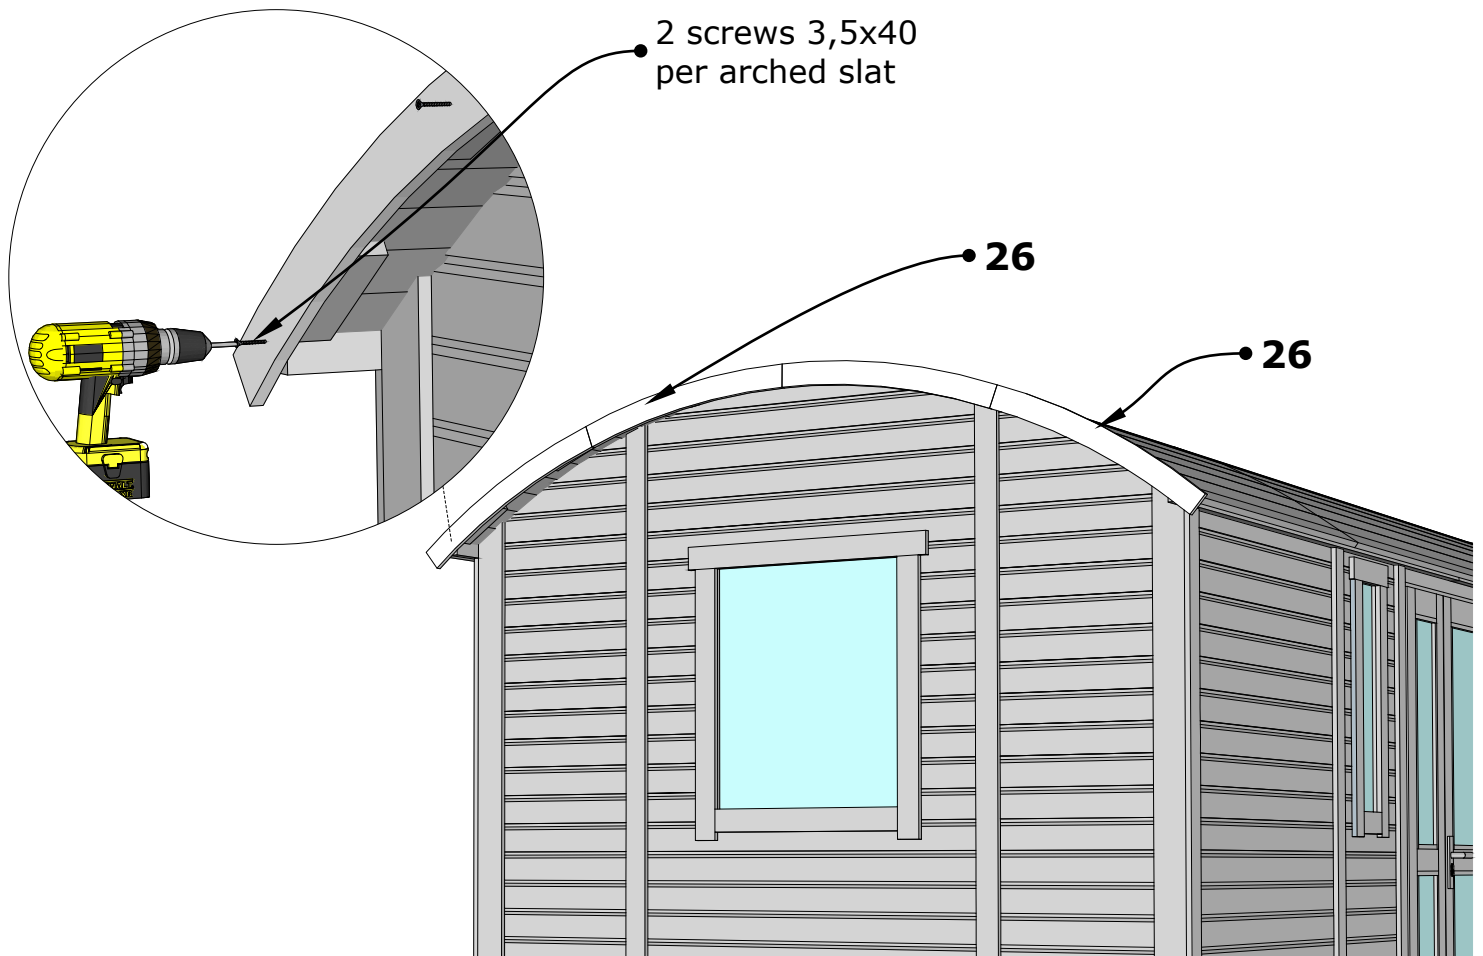

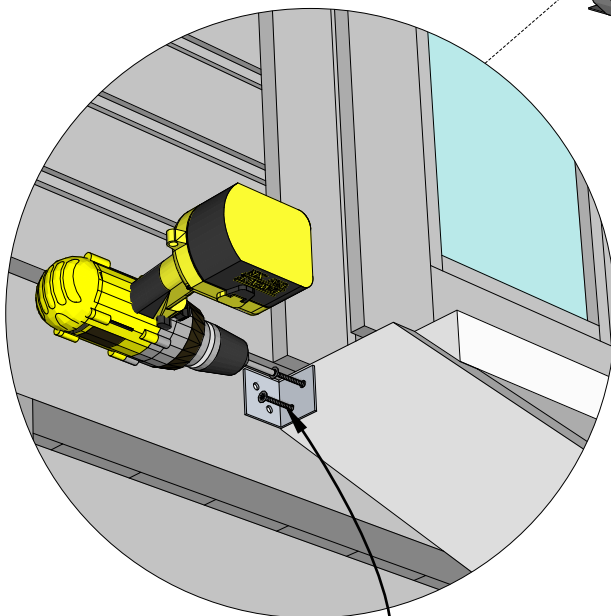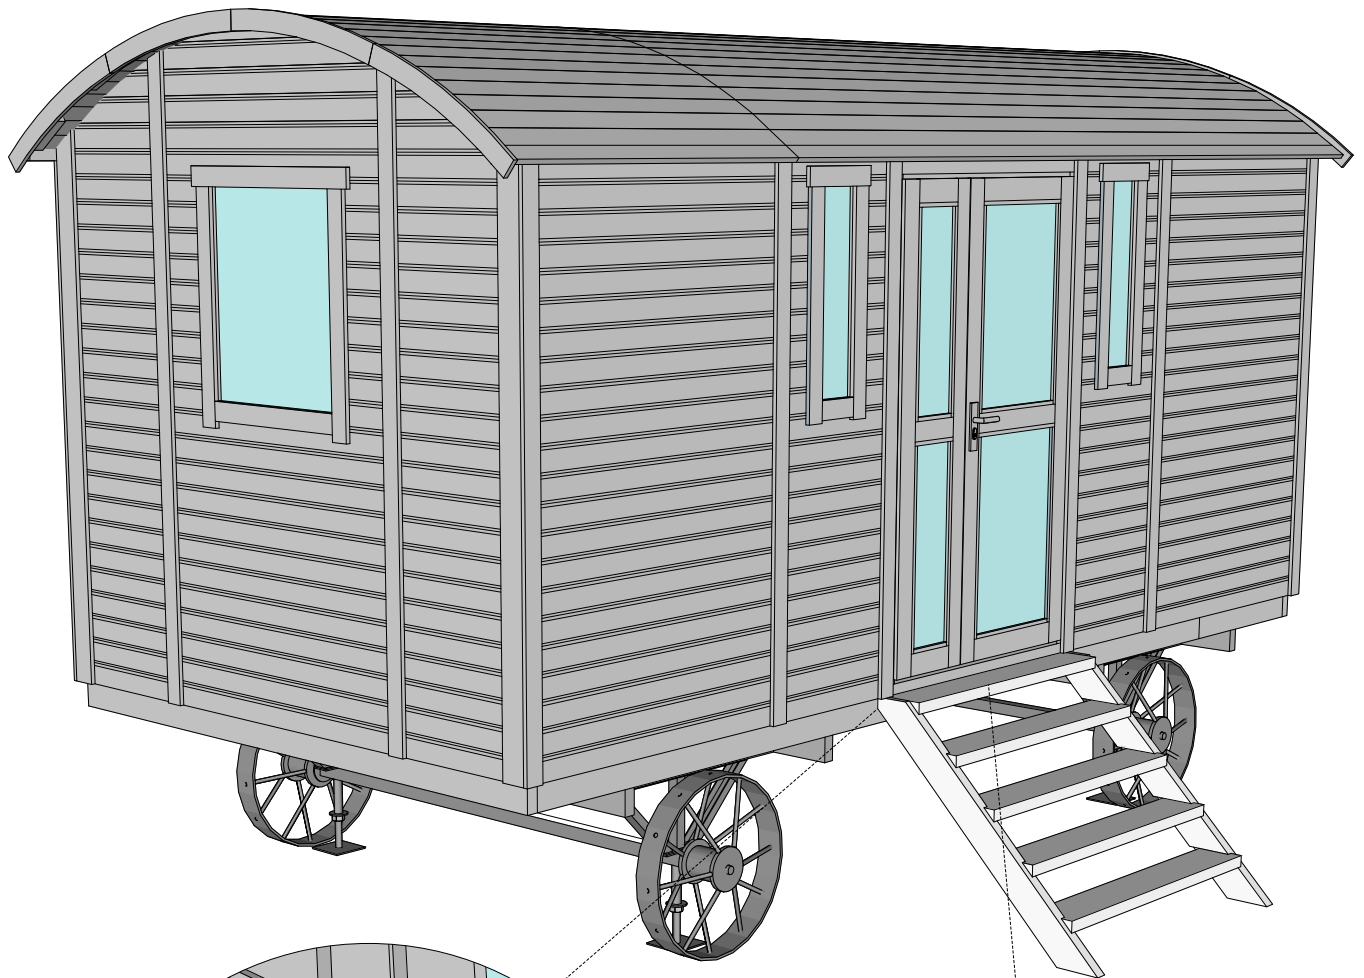

2 angles 40x40x40 +
6 screws 3,5x40 per
angle

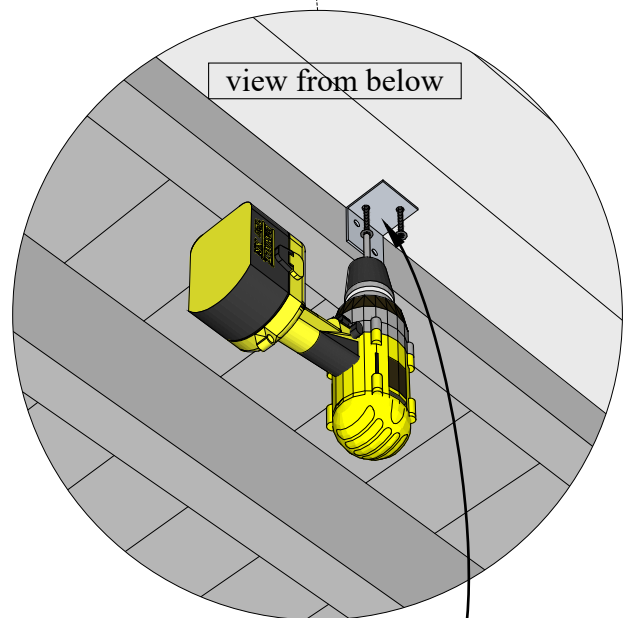

1 angle 40x40x40 +
6 screws 3,5x40 per
angle

PRODUCT:

WIN-code:

Article:

Packing list

GW Patricia sidedoor

XXXX - XX - XX

40.0179

Page

1/1

element nr.	element's name	quantity	dimension (mm.)	specify
1a	bottom beam	4	44 x 94 x 2368	
1b	bottom beam	4	44 x 94 x 1000	
1c	bottom beam	2	44 x 120 x 2368	
2a	bottom beam	7	44 x 120 x 4000	
2b	bottom beam	7	44 x 120 x 712	
2c	bottom beam	7	44 x 120 x 1600	
3a	floorboard	1	19 x 60 x 2368	first, without tap
3b	floorboard	53	19 x 90 x 2368	
4a	end wall 600, right	2	600 x 1980	
4b	end wall 600, left	2	600 x 1980	
4c	wall 1200 with open window	1	1200 x 1980	
5a	wall 1200	5	1200 x 1980	
5b	wall 1200 with n.o.window	2	1200 x 1980	
5c	wall 1200 with installed door	1	1200 x 1980	
6	wall 600 with non-open window	2	600 x 1980	
7	inner arch support	7	455 x 2406	
8	outer arch support, covered	2	2406 x 416	with panel
9a	roof board	1+1	19 x 70 x 3749	first/last
9b	roof board	1+1	19 x 70 x 1349	first/last
10a	roof board	29	19 x 90 x 3749	
10b	roof board	29	19 x 90 x 1349	
11	stairs side	1+1	44 x 120 x 1205	45° //
12	stairs tread	5	44 x 170 x 1152	
13a	end wall edge cover slat	4	16 x 94 x 2050	1 end 37°
13b	side wall cover slat	12	16 x 70 x 1936	
13c	end wall middle cover slat	4	16 x 70 x 2314	1 end 20°
18	slat under door element	1	19 x 40 x 1112	
18a	door element cover slat	1	16 x 44 x 1110	
25	roof edge arc fixing brick	16	19 x 40 x 180	
26	roof edge arc	8	L = 710 mm.	arc-element
31	the upper feather key	4	28 x 44 x 2549	1 edge 37°

Metal parts:

50	wagon wheel	4	fasteners set
51	wagon wheels washer	4	assembly instruction
51a	wheel's splint	4	window set
52	wagon axle	2	door set
53	basement support	4	
54	bolts and nuts for basement	4	
55	adjustable support leg	4	
56	adjustable leg's nut M27	4	
57	bolt M10, L = 70 mm.	12	
58	bolt M10, L = 110 mm.	4	
59	nut M10	16	
60	washer M10	32	